

helios IP 65

helios led IP 65

universal, one-sided emergency lighting fitting



Materials:

- white polycarbonate body
- transparent or opal polycarbonate cover

Mounting:

- wall or ceiling

Specification:


- 230V 50Hz power supply
- Charge time - 24 hours
- Network power supply and battery charge LED indicator
- High-temperature nickel-cadmium batteries
- Fluorescent lamp T5 8W, compact lamp 11W, 18W or led 1,2 W diodes
- Insulation class II
- Protection level IP65
- Ambient temperature: 0°C to +40°C
- Electronic protection against complete battery discharge
- Emergency operation time 1, 2 or 3 hours
- Recognition distance 25 m
- Connecting clips 3 x 2,5 mm²
- Compatibility with standard specifications PN-EN 60598, PN-EN 1838
- Optional PT or RS



STANDARD

Configuration of fitting

type	time [h]			work		power [W]			opcje dodatk.	
H	1	2	3	SE	SA	8	11	18	PT	RS
HL	1	2	3	SE	SA	1,2			PT	RS

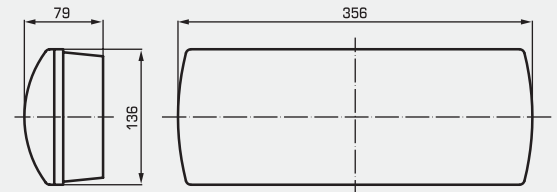

AUTOTEST

Configuration of fitting

type	time [h]			work		power [W]			autotest
H	1	2	3	SE	SA	8	11	18	AT
HL	1	2	3	SE	SA	1,2			AT

CENTRAL BATTERY

Configuration of fitting

typ	centr. bat.	moc [W]		
H	CB	8	11	18
HL	CB	1,2		

LIGHT SOURCE

Characteristic

power [W]	cup
8	G5
11	2G7
18	2G11
LED 1,2	

Legend:

- SE - non maintained (dark)
- SA - maintained (light)
- PT - manual test button
- RS - rubric monitoring system
- AT - autotest
- CB - for central battery EVG AC/DIC
- H - fitting helios IP 65
- HL - fitting helios led IP 65

