

panorama

universal, one-sided emergency lighting fitting

Materials:

- white plastic body
- white polycarbonate cover

Mounting:

- wall or ceiling

Specification:

- 230V 50Hz power supply
- Charge time - 24 hours
- Electric power network and battery charge LED indicator
- High-temperature nickel-cadmium batteries
- Fluorescent lamp T5 8W or compact fluorescent lamp 2G7-11W
- Insulation class I
- Protection level IP54
- Ambient temperature: 0°C to +40°C
- Electronic protection against complete battery discharge
- Emergency operation time 1, 2 or 3 hours
- Recognition distance 30 m
- Connecting clips 3 x 2,5 mm²
- Compatibility with standard specifications PN-EN 60598, PN-EN 1838
- Optional PT or RS



STANDARD

Configuration of fitting

type	time [h]			work		option		power [W]	
P	1	2	3	SE	SA	PT	RS	8	11

AUTOTEST

Configuration of fitting

type	time [h]			work		autotest	power [W]	
P	1	2	3	SE	SA	AT	8	11

CENTRAL BATTERY


Configuration of fitting

type	central bat.
P	CB

LIGHT SOURCE

Characteristic

power	cup
8	G5
11	2G7

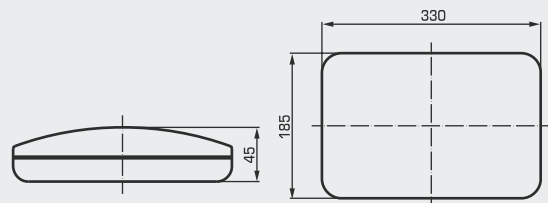

Legend:

SE - non-maintained
SA - maintained
PT - manual test button
RS - rubic monitoring system

AT - autotest
CB - for central battery evg
P - panorama fitting