

skw, skw led

universal one sided emergency lighting fitting

Materials:

- white plastic body, opal plastic cover

Mounting:

- wall

Specification:

- 230V 50Hz power supply
- Charge time - 24 hours
- Network power supply and battery charge LED indicator
- High-temperature nickel-cadmium batteries
- Fluorescent lamp T5 8W or LED 1,2W diodes
- Insulation class II
- Protection level IP 54
- Ambient temperature: 0°C to +40°C
- Electronic protection against complete battery discharge
- Emergency operation time 1, 2 or 3 hours
- Connecting clips 3 x 2,5 mm²
- Compatibility with standard specifications PN-EN 60598, PN-EN 1838
- Optional PT or RS



STANDARD

Configuration of fitting

type	time[h]			work		option	
SK	1	2	3	SE	SA	PT	RS
SKL	1	2	3	SE	SA	PT	RS

AUTOTEST

Configuration of fitting

type	time[h]			work		autotest
SK	1	2	3	SE	SA	AT
SKL	1	2	3	SE	SA	AT

CENTRAL BATTERY


Configuration of fitting

type	centr. bat.
SK	CB
SKL	CB

LIGHT SOURCE

Characteristic

power [W]	cup
8	G5
LED 1,2	

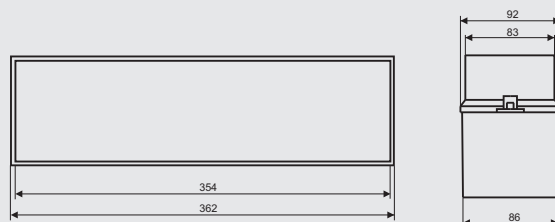

Legend:

- SE - non maintained (dark)
- SA - maintained (light)
- RS - rubic monitoring system
- AT - autotest
- CB - for central battery EVG AC/DC
- SK - fitting skw
- SKL - fitting skw LED