

helios p

universal, two-sided emergency lighting fitting

Materials:

- white polycarbonate body
- transparent polycarbonate cover, plexi glass

Mounting:

- ceiling

Specification:

- 230V 50Hz power supply
- Charge time - 24 hours
- Electric power network and battery charge LED indicator
- High-temperature nickel-cadmium batteries
- Fluorescent lamp T5 8W
- Insulation class II
- Protection level IP42
- Ambient temperature: 0°C to +40°C
- Electronic protection against complete battery discharge
- Emergency operation time 1, 2 or 3 hours
- Recognition distance 30 m
- Connecting clips 3 x 2,5 mm²
- Compatibility with standard specifications EN 60598, EN 1838
- Optional PT or RS



STANDARD

Configuration of fitting

type	time [h]			work		option	
HP	1	2	3	SE	SA	PT	RS

AUTOTEST

Configuration of fitting

type	time [h]			autotest	work	
HP	1	2	3	AT	SE	SA

FOR CENTRAL BAT.

Configuration of fitting

type	central bat.
HP	CB

NETWORK


Configuration of fitting

type	network
HP	S

LIGHT SOURCE

Characteristic

power [W]	cup
8	G5

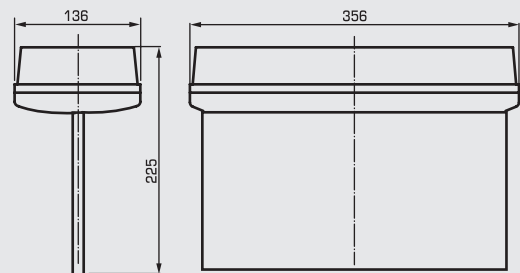

Legend:

- SE - non-maintained
- SA - maintained
- PT - manual test button
- RS - rubic monitoring system
- AT - autotest
- S - network
- CB - for central battery evg
- HP - helios p fitting

